

TATTOO

Condensate Removal System

- The Tattoo series is the most silent condensate removal system on the market today.
- Compact size compared to a tank pump
- Built-in check valve
- Thermal security of 230°F (110°C)
- 5ft communication wire
- Normally Open/Normally Closed alarm 100V to 240V/8A
- Delivered complete with mounting accessories ready to use



SUITABILITY

- Split, multisplit and VRF/VRV systems
- Tattoo 10 is for air-conditioner systems up to 36,000 BTU 3 tons
- Tattoo 16 is for air-conditioner systems up to 54,000 BTU 5 tons
- High wall split systems, Ducted units, Floor standing, and Chassis units

CONTENTS

- Tattoo pump body (1)
- Mounting bracket for horizontal and vertical positioning (2)
- Plug & Play detection unit with 5ft communication wire (3)

Connection elbow (4)Ventilation tube (5)

• Fixing screws and anchors (6)








CONDENSATE PUMPS


TATTOO

Condensate Removal System

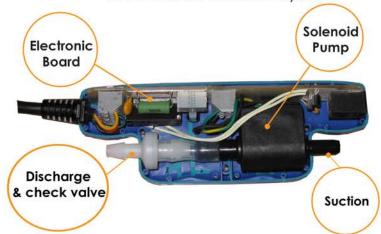


TATTOO 10 TATTOO 16 Max flow rate 2.1 gal/h 4.3 gal/h Flow rate at 3 ft 1.9 gal/h 3.8 gal/h Flow rate at 10 ft 2.8 gal/h 1.4 gal/h Max dry suction height 3.3 ft 3.3 ft Max wet suction height 6.6 ft 6.6 ft Max delivery height 28 ft 29.5 ft NO/NC-120v/8A NO/NC-120v/8A Alarm contact 5.9" x 2.2" x 1.1" 5.9" x 2.2" x 1.1" Pump dimensions Sensor unit dimensions 3.2" x 1.6" x 1.6" 3.2" x 1.6" x 1.6" Weight 15.5 oz 15.5 oz Power supply 120v or 230v 120v or 230v Noise level <19 dBA 22 dBA

FLOW RATE

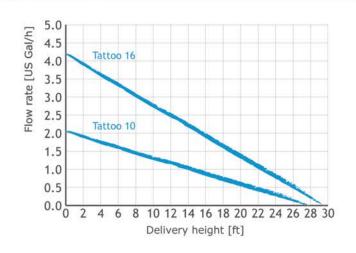



INSTALLATION OPTIONS

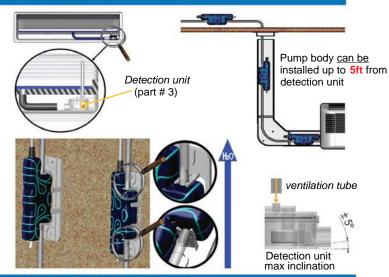

WIRING - RESIDENTIAL

WIRING - COMMERCIAL

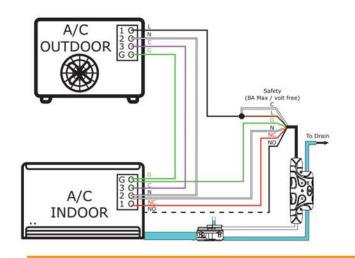

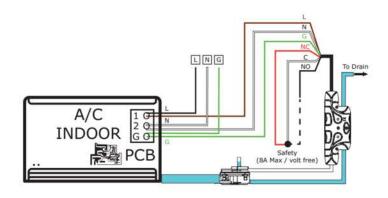

E-mail: info@hmax.com

www.hmax.com

Phone: (844) 500-HMAX 373 Nesconset Highway #147 Hauppauge, New York 11788